

S510 XS
HIGH POWER MODELS



USERS HANDBOOK

THIS HANDBOOK REFERS TO S510 XS HIGH POWER MODELS



***** SAFETY CODE *****

- 1 - TREAT THIS AIR RIFLE AS IF LOADED.
- 2 - NEVER POINT IT AT ANYONE, EVEN IF UNLOADED.
- 3 - NEVER LEAVE THIS RIFLE UNATTENDED WHEN COCKED OR LOADED.
- 4 - ALWAYS BE SURE OF WHAT LIES BEYOND YOUR TARGET.
- 5 - ALWAYS CONDUCT YOURSELF IN A SPORTSMAN-LIKE MANNER.

ALWAYS BE AWARE THAT YOUR ACTIONS WILL BE UNDER THE SCRUTINY OF OTHER MEMBERS OF THE PUBLIC WHO MAY NOT SHARE YOUR ENTHUSIASM FOR AIR WEAPONS. BAD PRACTICES PROMOTE BAD PUBLICITY. DO NOT JEOPARDISE YOUR FUTURE ENJOYMENT BY MISUSING THIS WEAPON.



PLEASE READ THIS MANUAL BEFORE USING YOUR NEW RIFLE, IT
CONTAINS IMPORTANT SAFETY INFORMATION AND INSTRUCTION ON
ADJUSTMENT AND MAINTENANCE.

WARNING ! - UNAUTHORISED DISASSEMBLY OF THIS RIFLE WILL INVALIDATE THE MANUFACTURERS WARRANTY

Important information

Before leaving the factory this rifle was Q.A. inspected and test fired using Air Arms pellets to check operation and final adjustment.

It was dispatched in a sealed purpose designed box. Air Arms may not be responsible for any damage to the contents or missing items if the box is not original, if it is damaged or the seals are not intact.

Air Arms cannot be held responsible for damage or missing items due to transit damage, mishandling or being tampered with after leaving the factory.

If this rifle is not received in the original box with the seals intact, please examine carefully for any damage, missing tools or documentation.

In the first instance any problems or complaints regarding this product should be referred to the supplier.

The air cylinder is a highly pressurised unit that must not be modified in any way. Serious personal injury may result if this, and the advice below is not followed.

Do not pressurize the cylinder if there are any surface abrasions or dents. Contact Air Arms for advice.

Do not store the rifle in places with, or near sources of high temperature such as fires or boilers.

Do not attempt to dismantle when pressurised.

Do not pressurize beyond the stated filling pressure (see filling instruction section). Damage caused by such action is not covered by the manufacturers warranty.

Only use clean, filtered and dry compressed air. Never use any other gas, particularly industrial or welding gases such as oxygen, carbon dioxide, acetylene, hydrogen, argon, etc.

If compressed air is being used other than from a diving shop, the inside of the cylinder should be inspected for corrosion at least annually. If in doubt contact Air Arms for advice.

In any event the cylinder should be inspected every two to three years depending upon usage.

Air Arms can provide this service at a reasonable cost.

To maintain this rifle in good working order it should be serviced annually by a competent gunsmith, your supplier may be able to provide this service or contact air arms.

A reasonable amount of advice will be provided to enable the end user to service their own rifle, however this is at the discretion of Air Arms and may not be given in all cases.

The velocity of this rifle has been set using Air Arms field pellets. If any other make or type of pellet is to be used the rifle must be re-tested with the pellet that is to be used, to ensure the muzzle energy is within the limits determined by current legislation.

Important information continued

Due to the nature of hand pumps and their relative inefficiency in removing moisture from the compressed air, the chances of corrosion damage to the cylinder and other internal components are increased. Therefore the rifle should be regularly serviced and/or checked for any signs of damage by a competent gunsmith.

Air Arms recommend using a dry pack filter kit on any hand pumps used to fill our air rifles.

If accessories not manufactured by Air Arms are used on this rifle, Air Arms can not be held responsible for any loss of performance. Contact your supplier or Air Arms for any advice on this matter.

Do not store this rifle in a damp place such as garden shed or garage.

Do not store this rifle in a plastic or PVC gun bag without first applying a surface corrosion inhibitor.

Always ensure the loading bolt is fully closed before firing.

CHECKING VELOCITY

- 1 Use a reliable chronograph to check velocity, (the formula below requires the reading to be in feet per second - FPS)
- 2 Use fine measurement scales to weigh the pellet, If scales are unavailable the pellet weight may be stated on the pellet container lid or contact the supplier. (The formula requires the weight to be in grains). To convert from grams to grains multiply by 15.432, i.e. $0.69 \text{ grams} \times 15.432 = 10.65 \text{ grains}$.
- 3 To find the muzzle energy in ft/lbs use the formula $(\text{FPS} \times \text{FPS} \times \text{Grains}) / 450240$, i.e. $(700 \times 700 \times 10.65) = 5218500 \text{ divide by } 450240 = 11.59$.

CURRENT LEGISLATION LIMITS NON-FAC HOLDERS, IN THE UK, TO AIR RIFLES WITH A MAXIMUM OF 12ft/lbs MUZZLE ENERGY.

WARNING! IT IS A VERY SERIOUS OFFENCE TO BE IN POSSESSION OF AN AIR RIFLE THAT YOU ARE NOT CERTIFICATED FOR. CONVICTION CAN RESULT IN CONFISCATION OF YOUR RIFLE, A HEAVY FINE OR IMPRISONMENT, EVEN A COMBINATION OF ALL THREE.

AIR ARMS RESERVE THE RIGHT TO ALTER THE CONSTRUCTION, APPEARANCE OR PERFORMANCE OF ANY PRODUCT WITHOUT PRIOR NOTIFICATION. ALL ILLUSTRATIONS ARE FOR INFORMATION PURPOSES ONLY AND DO NOT NECESSARILY SHOW THE EXACT MODEL THAT WAS PURCHASED.

Operating Instructions

Cocking

Hold securely in one hand and with the other pull the cocking lever out and to the rear. At the end of the stroke the magazine will index and present a new chamber, also the trigger mechanism will engage. This can be determined by the trigger blade 'kicking' forward at the end of the cocking stroke.

The effort required to cock the gun is quite low so minimal force should be used.



Note ! It is very important that the cocking lever is pulled back to the correct position. In one positive motion. The magazine indexes to the next pellet position as the bolt is retracted and it is possible for a partial index if the lever is not pulled back fully.

If you find the mechanism has not cocked completely but the magazine has indexed, Re-cock but before closing the bolt, remove the magazine and manually index it back to the empty chamber. Replace the magazine and fire as normal. If this procedure is not followed it is likely that you will load a second pellet into the barrel.

Push the lever back to the forward position. The rifle is now cocked and loaded, treat with caution.

Mounting/Demounting The Magazine & Pellets



Demounting


Fully cock the rifle, grip the magazine and slide out of the bolt housing without lifting.

Do not attempt to lift vertically as damage to the indexing spring will result.

To refit the magazine, fully cock the rifle, grip the magazine and slide in the bolt housing applying downward pressure with the fore finger to keep the base of the magazine against the bottom of the slot in the bolt housing. Take care not to damage the indexing spring.

Hold the magazine and drop a pellet into the chamber. Manually index to the next empty chamber and repeat until the magazine is full.

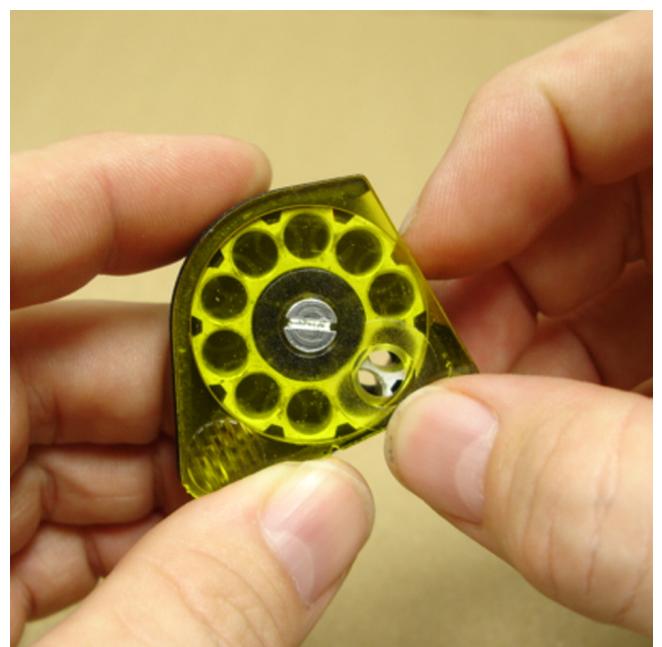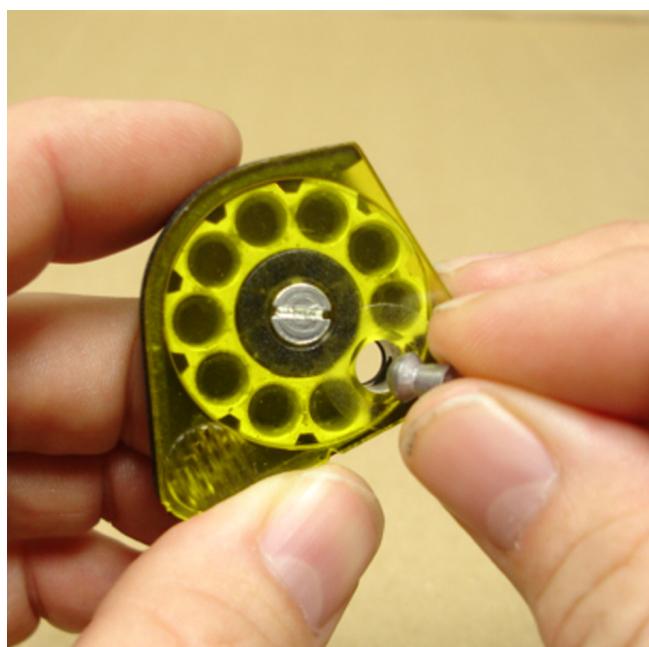

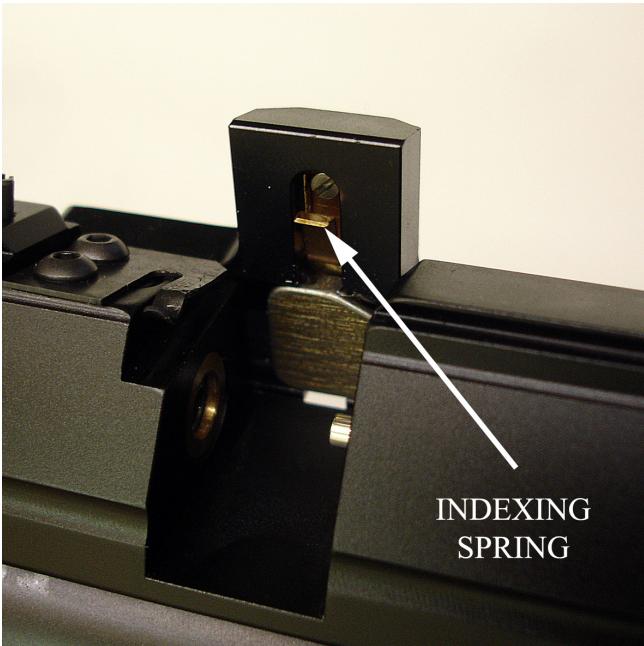

Be very careful not to damage the indexing spring when demounting or mounting the magazine. Follow the instructions carefully.

A small drop of oil should be applied to the magazine 'O' ring to keep it moist, and increase its life span.

Trigger Adjustments

The S510 models all have a two stage unit with adjustment to both stages plus a weight of pull adjustment. It is easy to upset the balance between the two stages and make the trigger inoperable if incorrectly adjusted.

If you have no experience of adjusting two stage triggers seek guidance or leave the trigger as set by the factory.

Note! Incorrectly adjusted trigger mechanisms are not covered by the manufacturers warranty. It is not possible to test this rifle with an incorrectly adjusted trigger, therefore all triggers leave the factory with correct adjustment. **WARNING!** Please note that it is possible to stop the safety button working with incorrect trigger adjustment. AN INCORRECTLY ADJUSTED TRIGGER CAN MAKE THE RIFLE UNSAFE TO HANDLE.

Description Of Operation

The S510 rifles have a true two stage trigger mechanism. This means that as the trigger is pulled the bottom sear gradually disengages with the top sear until the two disengage completely and the rifle goes off. If the pressure on the trigger is released at any point before full disengagement, the bottom sear will automatically return back to full engagement. This type of trigger allows very fine but safe operation because it is the release of the 2nd stage that actually makes the rifle fire. This arrangement is vastly superior to pseudo two stage triggers where the first stage is just a pivoting trigger blade that does not move sears. The down side is that they are more difficult to adjust correctly.


Adjustment

There are three adjuster screws, A-B-C.

The weight of pull adjuster (A) is located in the front of the trigger guard. Clockwise rotation increases pull weight. If adjusted too far the spring will become coil-bound and prevent trigger operation.

The second stage adjuster (C) is the rear screw located in the trigger blade. This screw determines the exact point that the 2nd stage starts. If the 1st stage screw is incorrectly adjusted this screw may not have any effect.

The first stage adjuster (B) is the front screw located in the trigger blade. This screw determines the length of travel before the 2nd stage starts. Clockwise adjustment reduces the first stage travel.

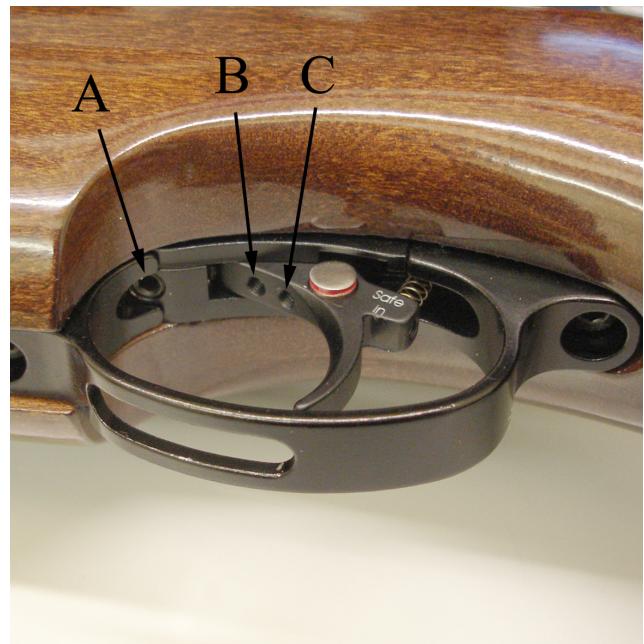

This rifle is fitted with a manual safety button located in the trigger blade.

To make the rifle safe the button must be pressed until it is flush with the side of the trigger blade.

Please note that it is possible to stop the safety button working with incorrect trigger adjustment.




With the button pressed in the rifle is safe.



With the button out the rifle is now ready to fire.

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|--------------------------------|------|
| 1 | S420S-2 | TRIGGER BLADE - BLACK ANODIZED | 1 |
| | S420GS-2 | TRIGGER BLADE - GOLD PLATED | |
| 2 | S521-2A | SAFETY BUTTON - PART ONE | 1 |
| 3 | S521-2B | SAFETY BUTTON - PART TWO | 1 |
| 4 | S526 | SAFETY BUTTON O RING | 1 |
| 5 | S523 | BALL BEARING | 1 |
| 6 | S522 | SAFETY BUTTON SPRING | 1 |
| 7 | S524 | SCREW | 1 |
| 8 | TX432 | ADJUSTER SCREW LOCKING PAD | 1 |
| 9 | S421 | SCREW | 2 |

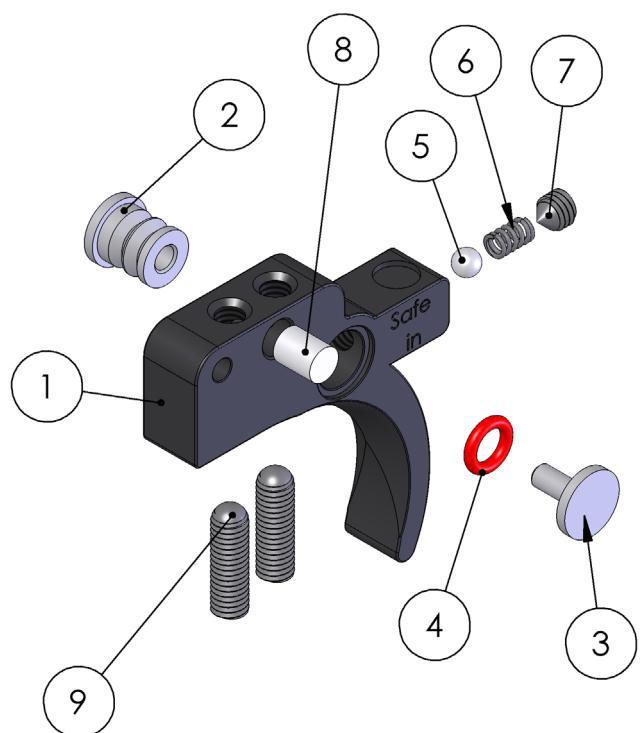


Power Adjuster

The S510 XS is fitted with a power adjuster on the side of the rifle. This can be used to adjust the power at any time by just turning anti-clockwise to increase and clockwise to decrease the power. Adjusting the power between shots will not harm the rifle.



On the left hand side of the rifle is a indicator to help select your most common power settings + = High. - = Low. The marks do not indicate a particular power as this would change depending on the pellets used.

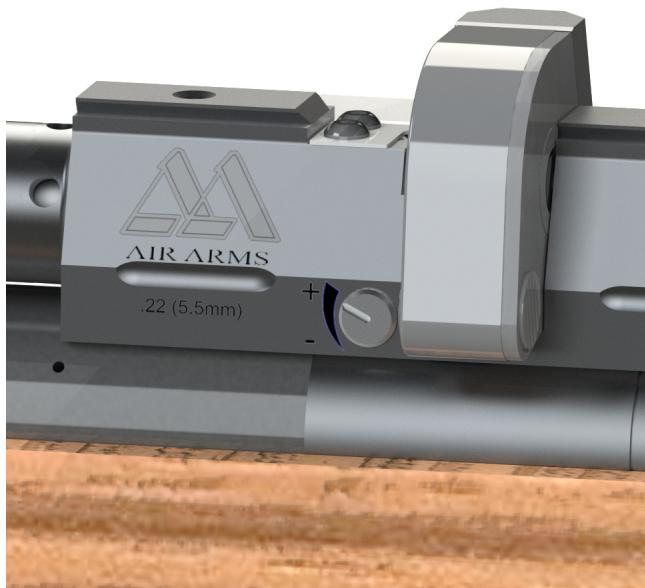

Filling Instructions

NOTE! ONLY USE CLEAN, DRY AND FILTERED COMPRESSED AIR, PREFERABLY FROM A DIVING SHOP. OVER PRESSURIZATION MAY DAMAGE THE CYLINDER BEYOND REPAIR.


First the female part of the filling kit (this was supplied with the rifle) must be fitted to your filling equipment. The female part (S475) has a 1/8th BSP male thread that screws directly into the hose of your pump or bottle.

Next remove the dust cover from the end of your rifle. This is achieved by unscrewing the cover in an anti-clockwise direction.



Once the connector is exposed the female part of the filling kit can be place on the male and press all the way on making sure that the 'O' rings on the male part are covered.

It is a wise precaution to hold the female part of the connector, during the filling procedure, as shown in the pictures below. This will ensure the female adaptor is located completely over the male part and prevent any accidental dislodging of the connector before you start to refill the cylinder.

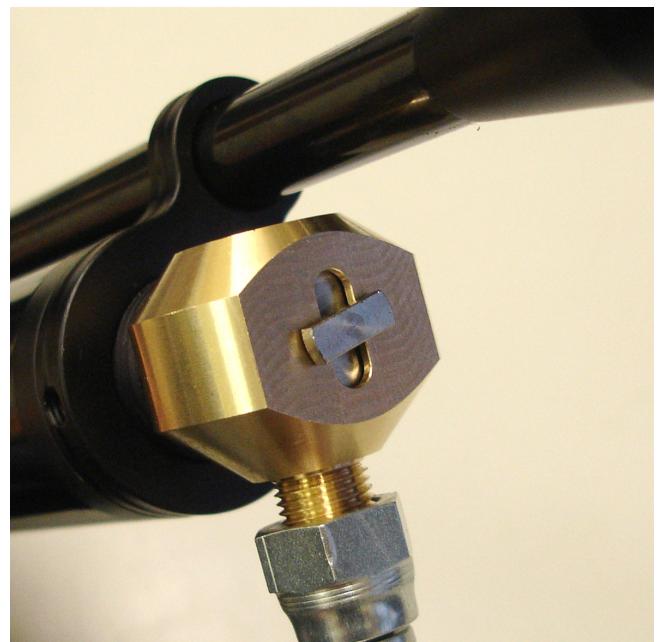

With the female in place the gun can now be filled.

If the rifle is empty the mechanism will need to be cocked to allow the firing valve to close. If the rifle is not cocked when the bottle is opened or the pump used, the air will pass the valve and exhaust through the barrel.

Check that the bleed valve on the filling equipment is closed (turn clockwise to close) then slowly open the main valve on bottle or start using the pump. The pressure in the hose will equalise and then the rifle will start to fill.

If you are filling your rifle from empty there may be some air exhausted through the barrel until the air pressure is sufficient to over come the firing valve spring this will happen at approximately 50 bar (750psi).

The filling pressure of the S510 XS is 250 bar (3625psi). Filling to a higher pressure will not increase either power or number of shots. Over filling will lower the power and may cause irreparable damage to the cylinder.

Once the filling pressure has been reached, close the valve on the bottle or stop pumping, open the bleed valve on the filling kit (to vent the hose, if you do not vent the hose you will not be able to remove the female from the rifle). Now the female connector can be removed from the rifle and end cap (E483BK) can be replaced over the male connector ensuring not to overtighten.



The S510 XS range of rifles are fitted with a pressure indicator mounted on the underside of the rifle just in front of the stock screw. This provides the user with a visual check on the amount of air remaining in the cylinder this indicator should not be used during the filling process as the gauge reaction speed has been slowed to prevent damage whilst filling. After filling the gauge can take several seconds to synchronize with the air in the cylinder. The gauge on the next page shows a gun with just over 100 bar of pressure. Although every gun is slightly different the recommended pressure at which to refill the S510 XS is 150 bar. **Always use the gauge on the filling kit.**



NOTE: On the front of the cylinder is an engraved warning reading....

READ MANUAL. MFP 250bar. MSP 250bar. DOM **/**/** **.
INSPECT BI-ANNUALLY.

MFP = Maximum Filling Pressure. The pressure is stated.
MSP = Maximum Safe Pressure. The pressure is stated.
DOM = Date of Manufacture. The date is stated.

Using Hand Pumps

The procedure for using hand pumps is the same as for bottle. It is more important to turn the female on the gun to lock it in place.

When using the pump it must be remembered that the first few pump are filling the hose and NOT the gun. When the pressure in the hose equalizes to that in the gun, the gun will start to fill.

It can take some effort to fill the gun using a pump and we recommend using the pump to top up instead of filling from empty.

Maintenance

Fixings

Regularly check the tightness of all fixings. However do not be tempted to over tighten as some parts are made from aluminium and stripped threads may result. Stripped threads are not covered by the manufacturers warranty.

Barrel

For ultimate accuracy, clean and re-lube the barrel frequently. It is difficult to advise how often is best for every circumstance, but every 250 shots is not too often if the desire is to keep the barrel in the best possible condition.

The correct materials are very important. Air arms only uses products made by Napier. Listed below is the Napier product and a more generally available alternative. If possible use napier for the best results.

| | |
|--------------------|--|
| CLEANER: | 'NAPIER GUN CLEANER', ALTERNATIVELY WHITE SPIRIT. |
| OIL: | 'NAPIER GUN OIL', ALTERNATIVELY '3 IN 1' OIL. |
| PULL-THROUGH PAD: | 'NAPIER RIFLE CLEAN', ALTERNATIVELY SOFT COTTON CLOTH. |
| PULL-THROUGH LINE: | 'NAPIER PULL THROUGH KIT', ALTERNATIVELY 20lb FISHING LINE |

As a rule cleaners and oils intended for shotguns and small/full-bore weapons are not suitable.

1. Cut a piece of line three times the length of your barrel, fold in half and tie ends together. Remove silencer if fitted. Open loading bolt.
2. Feed un-knotted end down barrel from the muzzle end until folded end protrudes out 50mm.
3. Cut a 100mm length of 'rifle clean' or 100 x 50mm piece of cloth and pass it between the protruding loop. Spray the pad with 'gun cleaner' or white spirit, turn the rifle upside down and pull the line back through the barrel slowly.
4. Repeat steps 2&3 until the pad is clean.
5. Repeat steps 2&3 once more without any cleaner on the pad to dry the barrel.
6. Repeat steps 2&3 once more with the pad sprayed with 'gun oil' or 3 in 1 oil.

IMPORTANT : THE REASON FOR TURNING THE RIFLE UPSIDE DOWN IS TO PREVENT EXCESS CLEANER/OIL FROM PASSING DOWN THE TRANSFER PORT INTO THE FIRING VALVE CHAMBER.

Lubrication

Lubrication of the internal mechanism is not covered in this handbook. This is best performed by a competent gunsmith or the factory and in any case should not be required until the annual service.

Apply a small dab of grease or oil, on the two pivot points shown in the diagram, and work-in by moving the bolt forwards and backwards. Wipe off excessive grease. Preferred grease is 'Napier g95 gun grease' On return from every shooting session, wipe all over the exterior with an oily rag to preserve the surface finish during storage.

A small drop of oil should be applied to the magazine O ring to keep it moist, and increase its life span.

Removing The Stock

It is good practise to remove the action from the stock from time to time to clean and inspect the underside of the action. This is particularly important if the rifle has been used in wet conditions.

The stock is held to the action using a single screw on the underside between the trigger guard and gauge. Using a 5mm allen key remove the screw and the action will lift free of the stock.

When refitting care must be taken not to over tighten the screw 'hand tight' will be enough to hold the action. Over tightening may force the screw into the wood.




| ITEM NO. | PART NUMBER | DESCRIPTION | QTY | ITEM NO. | PART NUMBER | DESCRIPTION | QTY | ITEM NO. | PART NUMBER | DESCRIPTION | QTY |
|----------|-------------|------------------------------|-----|----------|-------------|-----------------------------|-----|----------|-------------|---------------------------|-----|
| 1 | S507-R | FIRING VALVE BODY | 1 | 38 | S610-HP-R | TRANSFER PORT BUSH HP | 1 | 71 | JT416 | M5 X 18 SKT BTN | 1 |
| 2 | S500H-R | BOLT HOUSING | 1 | 39 | S382H-SL | FRONT CLAMP | 1 | 72 | S645 | INDICATOR GAUGE | 1 |
| 3 | S932-HP | VALVE SEAT - HP | 1 | 40 | E483BK | END CAP | 1 | 73 | S322 | M4 X 12 CSK SKT | 1 |
| 4 | S934 | M6 X 6 SKT SET CONE PT | 1 | 41 | S472 | MALE CONNECTOR | 1 | 81 | E127 | 3 X 7.8 ROLLER | 1 |
| 6 | FC101 | 9 X 1.5 NBR70 | 1 | 42 | S950L-R | CYLINDER - XTRA | 1 | 82 | E144 | 3 X 23.8 ROLLER | 1 |
| 7 | S960 | 2 X 1.5 NBR90 | 2 | | S950M-R | CYLINDER - CARBINE | 1 | 94 | S130 | COCKING ARM PIVOT BLOCK | 1 |
| 9 | S337 | 10 X 1.5 NBR70 | 1 | 43 | S600H-SL | BARREL TUBE - XTRA | 1 | 95 | S125 | COCKING ARM | 1 |
| 10 | S327 | BS005 NBR90 | 1 | | S600HC-SL | BARREL TUBE - CARBINE | 1 | 96 | TX227 | BUFFER | 1 |
| 11 | S484H | 20 X 1.5 NBR70 | 1 | 44 | FP134 | THREAD PROTECTOR | 1 | 97 | E160 | M3 CRINKLE WASHER | 2 |
| 12 | RN219-9 | BS011 NBR70 | 1 | 45 | S491-R | FIRING VALVE BODY | 1 | 98 | S542 | SIDE LEVER BUSH | 1 |
| 13 | S427 | 6 X 1 NBR70 | 1 | 46 | S473 | FILLING VALVE | 1 | 99 | S264 | COCKING LINK | 1 |
| 14 | S536 | BS008 NBR70 | 1 | 47 | S319 | COMPRESSION SPRING | 1 | 100 | S541 | LOADING BOLT BEARING | 1 |
| 16 | S140 | 4 X 2 NBR70 (.22 &.25) | 1 | 48 | S912 | BONDED SEAL | 1 | 101 | S541-1 | BEARING SHIM | 1 |
| 16 | S142 | BS102 NBR70 (.177) | 1 | 49 | S928 | M4 X 6 SKT BTN | 1 | | S501-SL | BOLT HSE BUSH - .22 | |
| 17 | S484 | 12 X 1.5 NBR70 | 1 | 50 | S946 | M2.5 X 16 SKT CAP | 2 | 102 | S502 - SL | BOLT HSE BUSH - .177 | 1 |
| 17 | S936-25 | REG HOUSING - CARBINE | 1 | 51 | S402AH-R | BARREL SEAL HOLDER HP -.22 | 1 | | S504-SL | BOLT HSE BUSH - .25 | |
| 18 | S936 | REG HOUSING - XTRA | 1 | | S402BH-R | BARREL SEAL HOLDER HP -.177 | 1 | 103 | RN113 | M5 X 6 SKT SET CUP PT | 2 |
| 19 | S342 | 15 X 2 NBR90 | 3 | 52 | E222 | BUSH | 2 | 104 | S505 | MAGAZINE RETAINING CLIP | 1 |
| 20 | S930A-150 | REGULATOR | 1 | 53 | TX239 | M3 X 3 SKT SET FT PT | 1 | 105 | RN193 | M3 X 6 SKT BTN | 2 |
| 21 | S938 | REGULATOR RETAINER | 1 | 54 | S303 | M3 X 3 SKT SET FT PT | 1 | 106 | S550-R | SIDE PLATE ADJ HP | 1 |
| 22 | S346 | M3 X 50 SKT CAP (.25) | 2 | 55 | S517 | 3/32 X 1/4 DIN6325 | 1 | 107 | S515A | INDEXING POST ASSY | 1 |
| 22 | S920-7 | M3 X 25 SKT CAP (.177 & .22) | 2 | 56 | S474 | 12 X 2 NBR70 | 2 | 108 | S560 | CAM PLATE | 1 |
| 23 | S836 | 23 X 2.5 NBR90 | 4 | 57 | TX228 | M4 X 4 SKT SET FT PT | 2 | 109 | S565 | M3 X 8 SKT CAP | 3 |
| 24 | S837 | 23 X 2.5 BACKUP RING | 2 | 58 | S471 | SINTERED FILTER | 1 | | S555A | MAGAZINE - .22 (10 SHOT) | |
| 25 | S370H-R | FIRING VALVE HP | 1 | | S401A-BO | BARREL - XTRA .22 | | | S555B | MAGAZINE - .177 (10 SHOT) | |
| 26 | S940 | VALVE STEM NUT | 1 | | S401B-BO | BARREL - XTRA .177 | | | S555C | MAGAZINE - .25 (10 SHOT) | |
| 27 | S942 | COMPRESSION SPRING | 1 | 59 | S401J-BO | BARREL - XTRA .25 | 1 | 110 | S554 | MAGAZINE - .25 (5 SHOT) | |
| 28 | S331 | COMPRESSION SPRING | 1 | | S401F-BO | BARREL - CARBINE .22 | | | S557 | MAGAZINE - .22 (5 SHOT) | |
| 30 | S340-R | GUIDE ROD | 1 | | S401G-BO | BARREL - CARBINE .177 | | | S558 | MAGAZINE - .177 (5 SHOT) | |
| 32 | S944 | GUIDE ROD NUT | 1 | 60 | PS224 | BAFFLE - XTRA | 5 | 111 | S600-3 | BARREL TUBE SUPPORT | 1 |
| 33 | S520H-R | STRIKER HP | 1 | | | BAFFLE - CARBINE | 3 | 112 | RN219-7 | BS012 NBR70 | 2 |
| 34 | S508-R | POWER ADJUSTER | 1 | 61 | S133 | SHROUD INSERT | 1 | 113 | E880-6 | BS0031-16 NBR70 | 2 |
| 35 | FP121 | BARREL SEAL - .177 | 1 | 62 | S530 | MAIN SPRING GUIDE | 1 | 114 | S952 | SPRING BAFFLE | 1 |
| 35 | S538 | BARREL SEAL - .22 | 1 | 63 | S356H | M4 X 5 MODIFIED | 1 | 115 | S143 | DAMPER | 1 |
| 36 | S522 | COMPRESSION SPRING | 1 | 67 | S355H-SL | M4 X 12 MODIFIED | 1 | 116 | FP205 | BS211 NBR70 | 1 |
| 37 | S528 | 7/64" BALL BEARING | 1 | 69 | RN102A | M3 X 16 SKT CAP | 4 | | | | |
| | | | 1 | 70 | S640AT | GAUGE MOUNT | 1 | | | | |

Items not shown


S475 - Filling adaptor

S655 - Stock screw washer

S625 - Stock screw

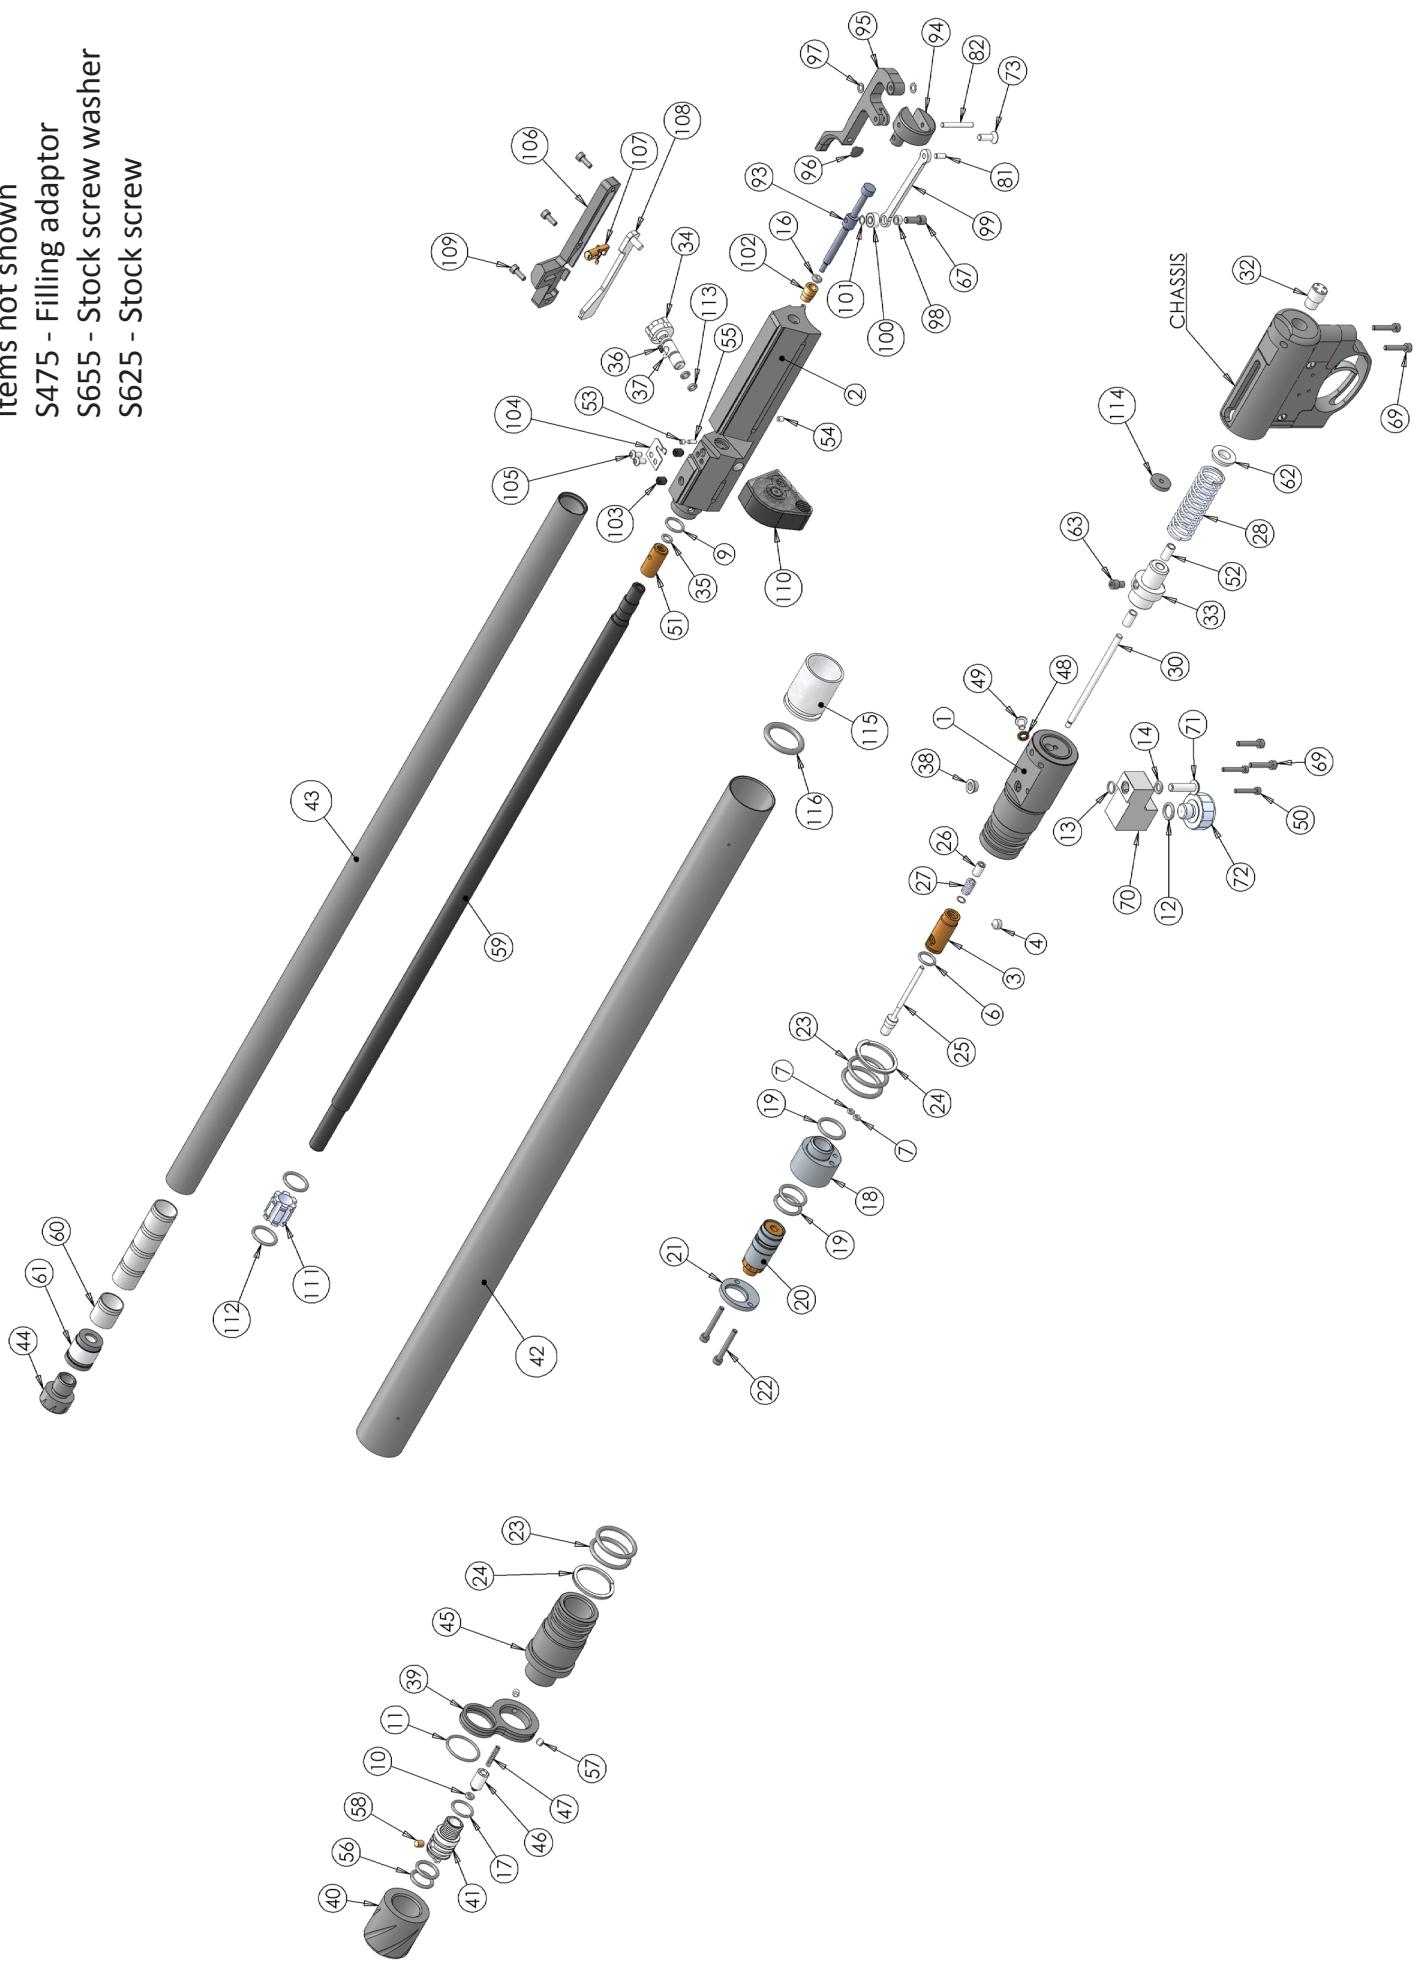

| ITEM NO. | PART NUMBER | DESCRIPTION | QTY. | ITEM NO. | PART NUMBER | DESCRIPTION | QTY. |
|----------|-------------|--------------------|------|----------|-------------|---------------------------------|------|
| 1 | S310-SL-R | STRIKER BODY | 1 | 15 | S311 | COMPRESSION SPRING | 1 |
| 2 | S322 | M4 X 12 CSK SKT | 1 | 16 | S522 | COMPRESSION SPRING | 1 |
| 3 | S313 | TRIGGER CHASSIS | 1 | 17 | TX381 | M5 X 6 SKT SET CONE PT TUFF LOC | 1 |
| 4 | S320-2 | TOP SEAR | 1 | 18 | S524 | M3 X 4 SKT SET CONE PT | 2 |
| 5 | S325-2 | MIDDLE SEAR | 1 | 19 | S495 | TOP SEAR SPRING | 1 |
| 6 | S321-2 | BOTTOM SEAR | 1 | 20 | S420S-2 | trigger blade | 1 |
| 7 | S496 | M3 X 6 SKT CAP | 1 | 21 | S421 | M3 X 10 SKT SET FT PT | 2 |
| 8 | S316 | M4 X 25 SKT CAP | 1 | 22 | TX432 | ADJUSTER SCREW LOCKING PAD | 1 |
| 9 | TX460 | M4 X 12 SKT CAP | 1 | 23 | S523 | 3/32" BALL BEARING | 1 |
| 10 | TX236 | M4 X 16 SKT CAP | 1 | 24 | S521-2A | SAFETY BUTTON - PART ONE | 1 |
| 11 | RN106 | M3 X 6 CSK SLOT | 2 | 25 | S521-2B | SAFETY BUTTON - PART TWO | 1 |
| 12 | S326 | 2 X 11.8 ROLLER | 3 | 26 | S526 | 3 X 1 SIR70 | 1 |
| 13 | TX398 | 3 X 11.8 ROLLER | 1 | 27 | S314 | trigger guard | 1 |
| 14 | S319 | COMPRESSION SPRING | 1 | 28 | S318 | COVER PLATE | 1 |

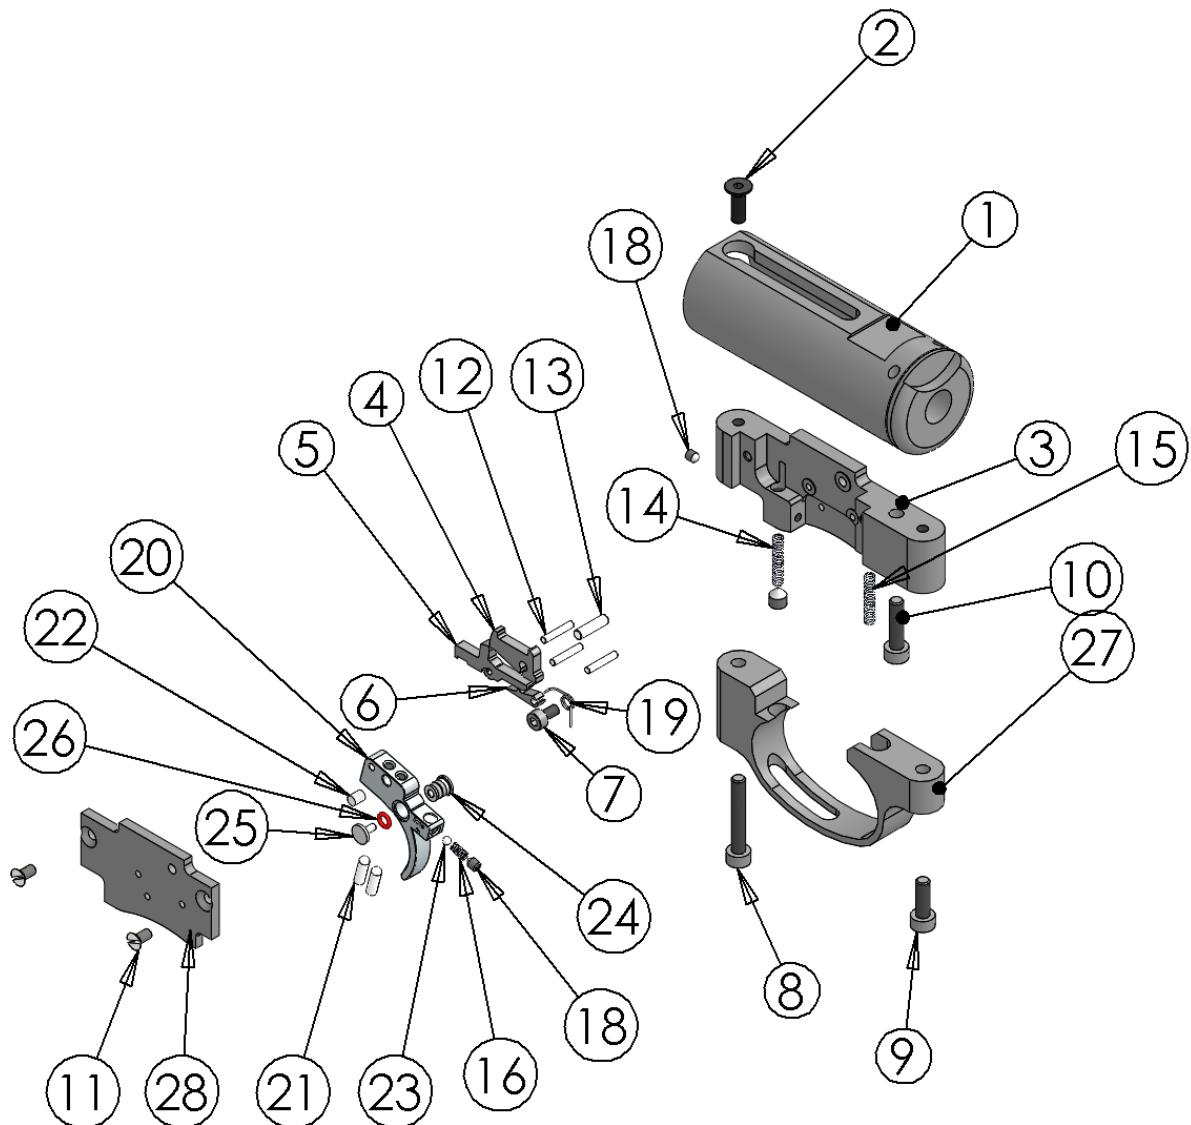

WARRANTY (UK ONLY)

*The Air Arms warranty covers repairs free of charge if the item is up to 3 years old, from date of purchase (UK only). The warranty covers faulty materials and workmanship, not reasonable wear and tear. The warranty applies to items purchased from new; **proof of purchase is required.** This cover is not transferable, therefore it applies to the original purchaser only. Please retain your receipt and return the warranty form (below) or fill in the online form at: www.air-arms.co.uk/warranty-submission.*

What is covered

Replacement parts and labour. Return transportation to the consumer (UK mainland only).

What is not covered

Transportation from the consumer to Air Arms.

Damage caused by misuse, abuse, disassembly or lack of routine maintenance/servicing. No warranty is implied as to the fitness for any particular purpose. Return transportation to consumers outside the UK mainland. Any rifle with serial number removed or altered.

PLEASE RETURN THIS PART

Gun No_____ Model_____

Date of Purchase_____

Purchased from_____

Your name and address_____

IMPORTANT INFORMATION

Please read the following information and instructions in the users handbook, they are vital to the long term serviceability of your rifle.

The adjustments and settings of this rifle have been set with special equipment at the factory to obtain the optimum performance, these must not be altered in any way (unless otherwise indicated in the users handbook). Any such alterations may invalidate the warranty.

If you experience any problems, please contact your retailer or place of purchase in the first instance. Explain the fault, they will advise you on whether the rifle should be returned to them or Air Arms.

May we suggest that you have the rifle serviced annually to maintain the long term reliability of the rifle. Could we please ask you to complete the form overleaf and return to Air Arms. It is important for us to keep a record of all users.

This will enable us to contact you in future, to pass on useful information and/or to get your opinions and general feedback.

Anticipating your cooperation and wishing you every success in your shooting.

Affix
stamp
here

AIR ARMS
HAILSHAM INDUSTRIAL PARK
DIPLOCKS WAY
HAILSHAM
EAST SUSSEX BN27 3JF
ENGLAND



